



The Endoline 200 Series has become one of the most successful case erector designs in over 20 years of production. Key to its success are a number of unique features that combine to make it extremely efficient, reliable and versatile while handling a wide variety of case sizes and styles.

Features of the 222/224 include:

Dual Opposing Vacuum Case Opening



This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.

Low Cost of Ownership



The Endoline 222 and 224 Case Erectors are designed to give you the best possible value for your investment. Our unique set of features means you will gain maximum productivity from your Case Erector with minimal stoppage time for problem-solving or case size changes.

Compact

Width:
1850mm
Length:
2000mm

With a surprisingly compact footprint these machines will fit in to areas with restricted floor space or areas not normally suited to the installation of large or bulky machinery.

Clear Access



Simple mechanical operation and clear access for easy size change, cleaning and maintenance.

Easy to Use



These machines are designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.

Robust Construction



High quality components, housed in a robust, computer designed chassis allow for minimal servicing. Designed for the rigours of typical 24-hour end-of-line packaging environments.




222 & 224

Fully Automatic Case Erectors

Options include:

- Low hopper sensing
- Low tape and no tape sensing
- Low glue sensing (224)
- Visual/audible failure alarm
- High speed kit

222 Shown

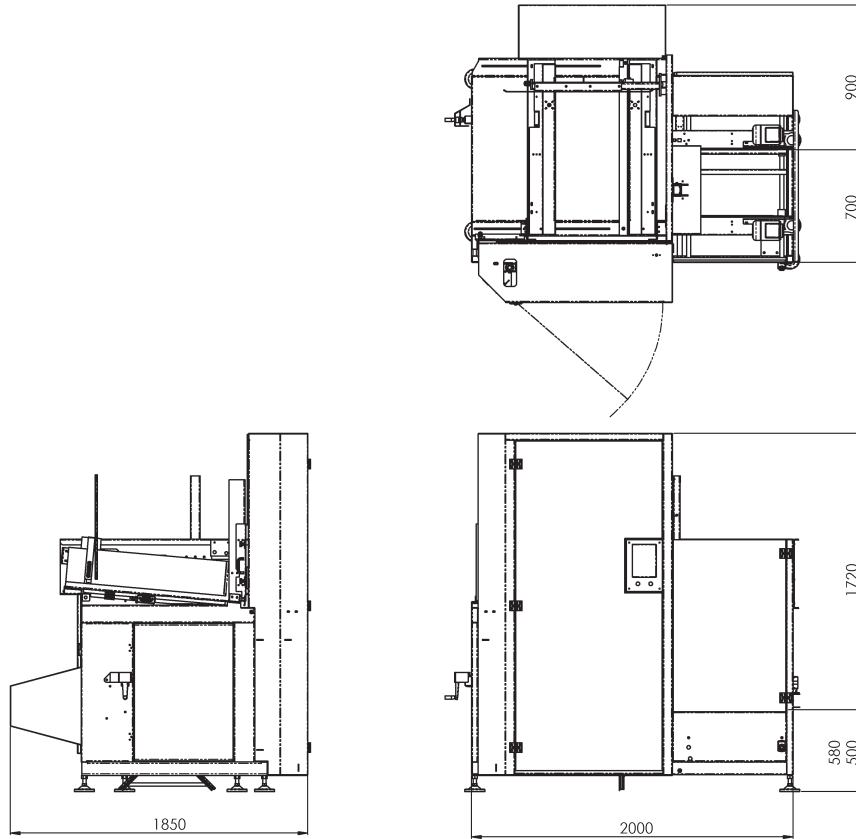

Case Dimensions (mm)

		Length	Width	Height (Open)
222/224	Minimum	200	200	175
	Maximum	600	500	600

*Note: The 222 case erector seals cases with self-adhesive tape.
The 224 case erector seals cases with hot melt glue.*

Speed

Standard up to 12 cases per minute

Optional up to 14 cases per minute

Electrical Supply

Type 222 Three phase:
380 - 415V, 50Hz, 0.5kW

Type 224 Three phase:
380 - 415V, 50Hz, 4.0kW

Pneumatics

80psi (5.5bar)

Machine Finish

Mild steel, powder coated white (RAL 9010) or stainless steel

Tape Size (Type 222)

Standard: up to 50mm wide
Optional: up to 75mm wide

© Endoline reserves the right to change specifications without prior notice.



Endoline Machinery Limited
Stratton Business Park, London Road
Biggleswade, Bedfordshire
SG18 8QB
United Kingdom

Telephone: +44 (0) 1767 316422
Facsimile: +44 (0) 1767 318033
E-mail: sales@endoline.co.uk
Website: www.endoline.co.uk

system range