



Suitable for small, medium and large size cases this case erector seals cases with self-adhesive tape (Type 225) or hot melt glue (Type 226) and has the added feature of a low level hopper for the ergonomic loading of heavy case blanks. It erects cases at speeds of up to 12 cases per minute.

Features of the 225/226 include:

Dual Opposing Vacuum Case Opening



This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.

Low Level Hopper



Allows for the ergonomic loading of heavy case blanks. The in-line process flow enables a more efficient use of space in the plant layout. Hopper extension options are available to increase capacity, thus lengthening the time between reloads.

Easy to Use



The 225 is designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.

Low Cost of Ownership



The Endoline 225 Case Erector is designed to give you the best possible value for your investment. Our unique set of features and benefits means you will gain the maximum productivity with minimal stoppage time for problem-solving or case size changes.

Clear Access



Simple mechanical operation and clear access for easy size change, cleaning and maintenance.

Robust Construction



Built with high quality components and housed in a robustly designed chassis, the 225 is robust enough to withstand the rigours of typical 24-hour end-of-line packaging environments.




225 & 226

Fully Automatic Case Erectors

Options include:

- Low hopper sensing
- Low tape and no tape sensing
- Low glue sensing (226)
- Visual audible failure alarm

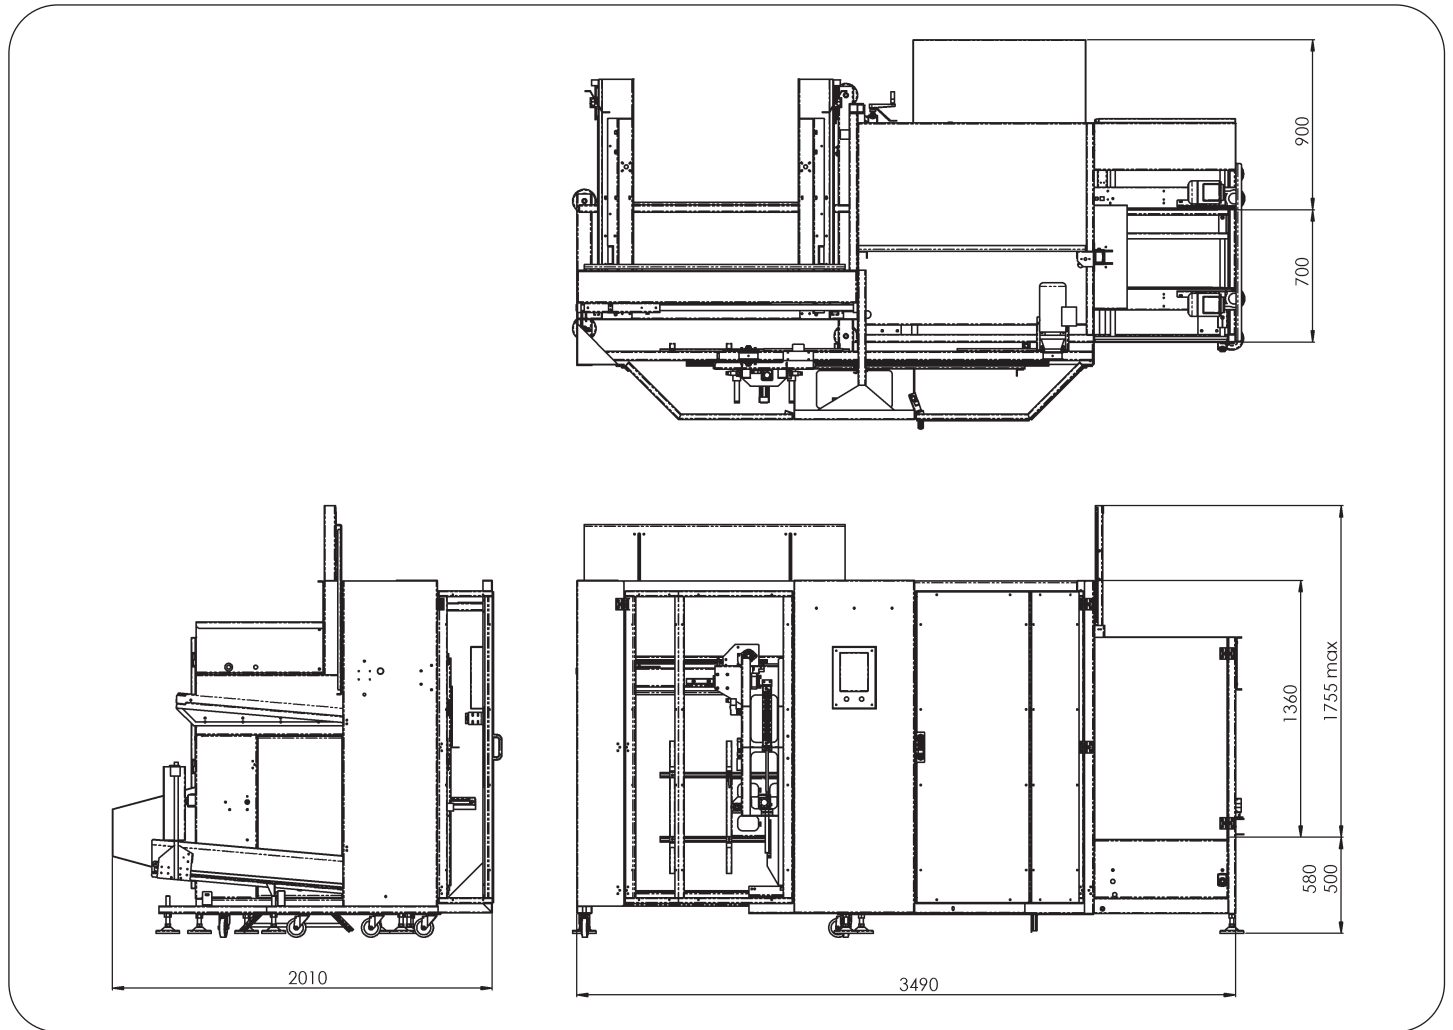

Case Dimensions (mm)

		Length	Width	Height (Open)
225/226	Minimum	200	200	175
	Maximum	700	500	750

Speed

Up to 12 cases per minute

Pneumatics

200 litres/min (5.5 bar)
(19.5 litres/cycle)

Electrical Supply

Type 225 Three phase:
380 - 415V, 50Hz

Type 226 Three phase:
380 - 415V, 50Hz

Tape Size (Type 225)

Standard: up to 50mm wide
Optional: up to 75mm wide

Machine Finish

Mild steel, powder coated white
(RAL 9010) or stainless steel

© Endoline reserves the right to change specifications without prior notice.



Endoline Machinery Limited
Stratton Business Park, London Road
Biggleswade, Bedfordshire
SG18 8QB
United Kingdom

Telephone: +44 (0) 1767 316422
Facsimile: +44 (0) 1767 318033
E-mail: sales@endoline.co.uk
Website: www.endoline.co.uk